

EXHAUST GAS RECIRCULATION

11801


Error Message after Replacement

ERROR DESCRIPTION:

- Signal voltage is out of the tolerance range
- New part with an error message
- Error lamp lights up
- Error code P0400

If any of the above problems arise after installing the EGR valve, then the adjustment range stored in the engine control unit is configured wrongly.

With a software update of the engine control unit, the control range can be expanded accordingly, and the problem will thus be solved.

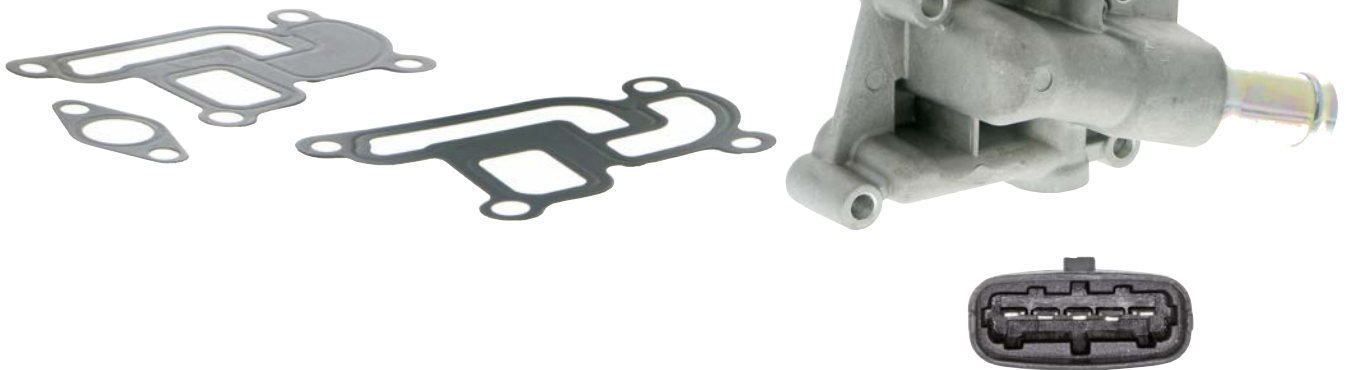

OPEL AGILA, ASTRA G, ASTRA H, CORSA C, MERIVA, TIGRA

X-Ref: 08 51 593
9157671

V40-63-0011

For further information visit www.autoteile.de