



INA Service Info



Belt Pulley Decoupler

Diamond-Coated Washer

Manufacturer: Volvo

Models: S60, S80, S90, V40, V60, V70, V90,
XC60, XC70, XC90

Engines: B4204, D4204

Part no.: 544 0503 20
544 0504 20

For current listing refer to catalogue media

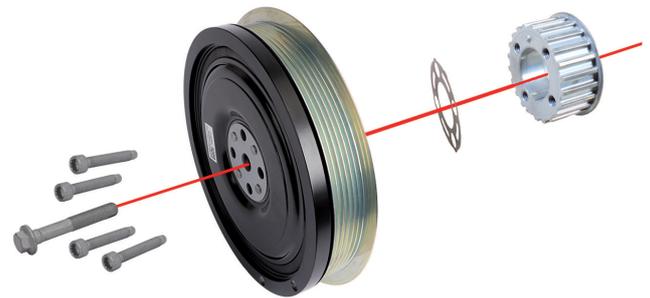


Figure 2: Bolts of the belt pulley decoupler, central bolt of the crankshaft, belt pulley decoupler and diamond-coated washer

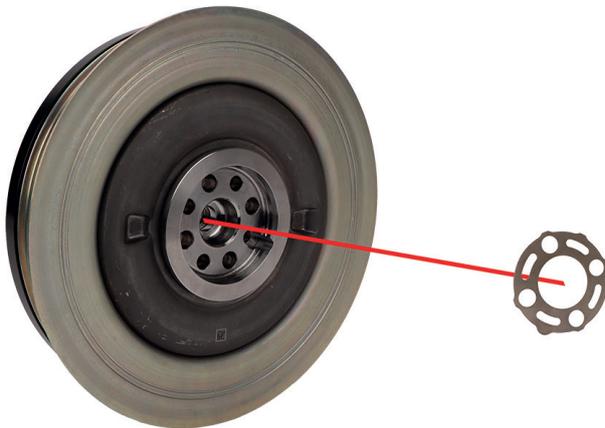


Figure 1: Crankshaft side of the belt pulley decoupler with diamond-coated washer.

In the KITS mentioned above, the diamond-coated washer is already inserted in the installation position on the belt pulley decoupler

On the vehicles mentioned above, it is necessary to disassemble the belt pulley decoupler in order to replace the timing belt.

The specifications from the vehicle manufacturer indicate that it is necessary to replace the bolts of the belt pulley decoupler, the central bolt of the crankshaft and the diamond-coated washer (Figure 2) after any replacement or disassembly process.

The central bolt of the crankshaft, the diamond-coated washer and the bolts of the belt pulley decoupler are part of all relevant KITS. Thanks to its special coating, the supplied washer, in conjunction with the central bolt, prevents the belt pulley decoupler from releasing independently.

Please observe the vehicle manufacturer specifications!

You want more? We can help!

Phone: +44 (0) 1432 264 264

Fax: +44 (0) 1432 375 760

aftermarket.uk@schaeffler.com

www.repxpert.co.uk