
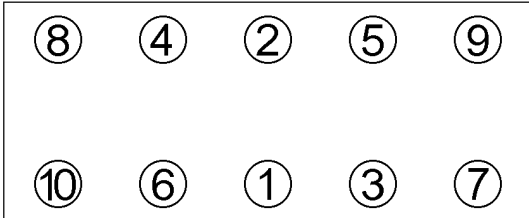


Anziehvorschrift für Zylinderkopf			574.200		 Das Original		
Tightening Instructions for Cylinder Head			passend für / suitable for				
Instructions de serrage pour culasse			adaptable à / adaptable a				
Prescripciones de apriete para culatas			Toyota/Mini				
Schraubenkopf / Head shape Tête de vis / Cabeza de tornillo			Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete				
							
728.080 M 12x1,75x180							
Anziehen/ Tightening/ Serrage/ Apriete			* 34 Nm 68 Nm ➤ 90° ➤ 90°				
Zeichenerklärung / Explanations / Explication / Explicacion							
* neue Zylinderkopf-schrauben verwenden		use new cylinder head bolts		utiliser des vis neuves		emplar tornillos nuevos	
★ Warmlauf (80°C)		warm up time (80°C)		chauffage (80°C)		calentamiento (80°C)	
☐ Schrauben einzeln lösen und wieder anziehen		loosen and tighten each bolt		deserrer et serrer vis par vis		aflojar y apretar tornillo a tornillo	
● Setzzeit		relaxation time		durée de tassement		tiempo de espera	
➤ Drehwinkel		torque angle		angle de serrage		ángulo de giro	
Motortyp / Engine type / Type de moteur / Tipo de motor							
✚ 0,95mm							
Mot: 1ND, 1ND-TV							
1,4 ltr Diesel							
55 kW (75 PS)							
Mini One ←09/2005							
Yaris 2001➔							
ElringKlinger AG, Max-Eyth-Str.2 72581 Dettingen / Erms. Tel. 07123/724 601							
574.200							