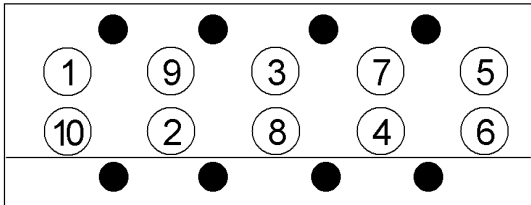


Anziehvorschrift für Zylinderkopf			521.347	 Das Original
Tightening Instructions for Cylinder Head			passend für / suitable for	
Instructions de serrage pour culasse			adaptable à / adaptable a	
Prescripciones de apriete para culatas			Alfa Romeo	
Schraubenkopf / Head shape Tête de vis / Cabeza de tornillo		Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete		
				
Anziehen/ Tightening/ Serrage/ Apriete	POS. 1-10 (M 14) * 29 Nm ➤ 50° ➤ 50° ★ 20 min ● 210 min ➤ 30°	(M 12) * 25 Nm 50 Nm 88 Nm ★ 20 min ● 210 min ☐ 30°+88 Nm		
Zeichenerklärung / Explanations / Explication / Explicacion				
✱	neue Zylinderkopf-schrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
★	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
☐	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
●	Setzzeit	relaxation time	durée de tassement	tiempo de espera
➤	Drehwinkel	torque angle	angle de serrage	ángulo de giro
Motortyp / Engine type / Type de moteur / Tipo de motor				
1,59/1,50 mm ÷				
VM TD 1995 ccm/2393 ccm/2500 ccm				
Alfa 90 TD 2,4 / Alfa 75 TD 2,0 Alfetta TD 2,0 / Giulietta TD 2,0				
ElringKlinger AG, Max-Eyth-Str.2 72581 Dettingen / Erms. Tel. 07123/724 601			*521.347*	