
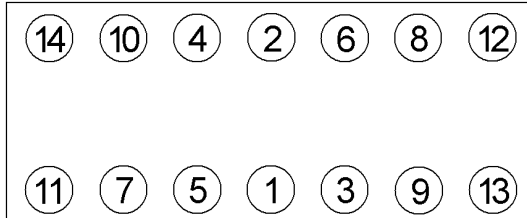


Anziehvorschrift für Zylinderkopf	749.370	 Das Original
Tightening Instructions for Cylinder Head		
Instructions de serrage pour culasse		
Prescripciones de apriete para culatas		
	passend für / suitable for adaptable à / adaptable a	BMW

Schraubenkopf / Head shape Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete
Tête de vis / Cabeza de tornillo



802.700
M 12 x 157



Anziehen/ * 58 - 62 Nm
Tightening/ ● 25 min
Serrage/ 78 - 82 Nm
Apriete ✱ 80°C / 25 min
▶ 30° - 40°

Zeichenerklärung / Explanations / Explication / Explicacion

✱	neue Zylinderkopfschrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
✱	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
□	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
●	Setzzeit	relaxation time	durée de tassement	tiempo de espera
▶	Drehwinkel	torque angle	angle de serrage	ángulo de giro

Motortyp / Engine type / Type de moteur / Tipo de motor

Mot. M30 B35, 3430cm³

E28 528i, 535i, M535i

E24 635CSi 05/1982→06/1987

E23 735i 09/1982→, 745i →05/1983

E34 535i

E32 735i, iL

Ø 93,5 mm, $\frac{1}{2}$ 1,72mm

ElringKlinger AG, Max-Eyth-Str.2
72581 Dettingen / Erms. Tel. 07123/724 601

749.370