


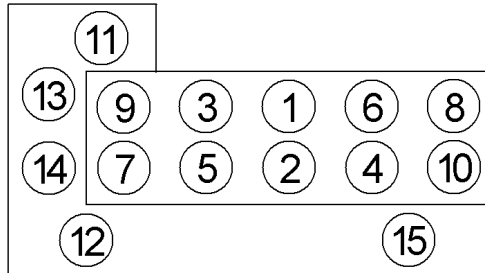
<b>Anziehvorschrift für Zylinderkopf</b>	<b>709.530</b>	 Das Original
<b>Tightening Instructions for Cylinder Head</b>		
<b>Instructions de serrage pour culasse</b>		
<b>Prescripciones de apriete para culatas</b>		
	passend für / suitable for adaptable à / adaptable a	<b>Nissan</b>

Schraubenkopf / Head shape  
Tête de vis / Cabeza de tornillo

Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete



068.410  
M 10x146x1,5



Anziehen/ Tightening/ Serrage/ Apriete	<input checked="" type="checkbox"/> * <input type="checkbox"/> □ <input checked="" type="checkbox"/> ►	Schrauben 1-10 39 Nm 78 Nm 35 Nm 60° Schrauben 11-15 6,5 - 8,0 Nm
---	--	---

Zeichenerklärung / Explanations / Explication / Explicacion

* □	neue Zylinderkopfschrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
★	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
□	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
●	Setzzeit	relaxation time	durée de tassement	tiempo de espera
►	Drehwinkel	torque angle	angle de serrage	ángulo de giro

**Motortyp / Engine type / Type de moteur / Tipo de motor**

Ø: 72,3mm;  $\frac{1}{2}$ : 1,26mm

Mot: CG10DE, CG13DE

1,0 ltr.-1,3 ltr.  
40-55 kW (54-75 PS)

Micra 1992-2003

ElringKlinger AG, Max-Eyth-Str.2  
72581 Dettingen / Erms. Tel. 07123/724 601

**\*709.530\***