

INSTALLATION INSTRUCTIONS



MAHLE OX 1293D



Fig.1

1. Replace the gasket and point the filter towards the cap as shown in fig.1.



Fig.2

2. Push the filter firmly until it clicks.
Oil the new gasket.

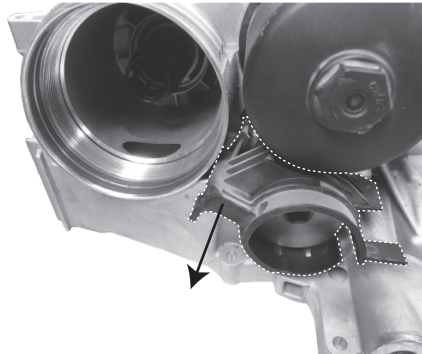


Fig.3

3. Pull the retaining clip.

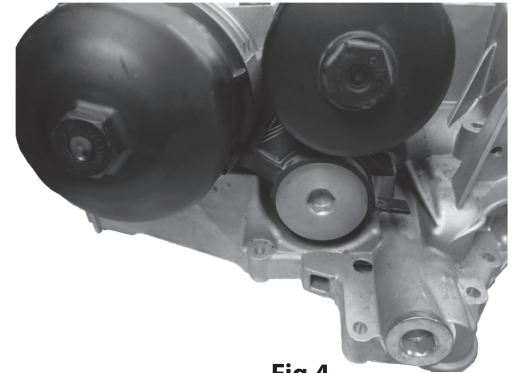


Fig.4

4. Screw the cap with the filter on the housing using 40Nm torque.
Push back the retaining clip.