

**DO NOT REMOVE OR TIGHTEN AIR FITTING ON THE NEW PART**



**SEE REVERSE  
SIDE**

This product ships pressurized, prior to installation please ensure it is properly inflated by pressing on the exposed portion of the air spring. The air spring should be firm and resemble the image below. If the air spring is not inflated or does not resemble the image below, please contact your authorized retailer.



**Arnott® is committed to the quality of its products. If you have a question or problem with any Arnott product, please contact Arnott by calling 800-251-8993 during normal business hours or email [techassistance@arnottinc.com](mailto:techassistance@arnottinc.com). (In the EU please call +31 (0)73 7850 580 or email [info@arnotteurope.com](mailto:info@arnotteurope.com))**

## OE AIR FITTING REMOVAL




Prior to inserting the existing air line into the new air fitting you will need to remove the old original equipment air line fitting.




#1

OE AIR LINE FITTING

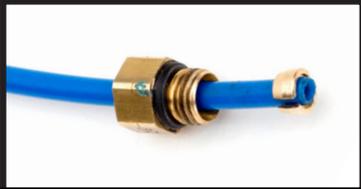

#2

SLIDE THE THREADED PORTION UP THE LINE AND SPREAD THE COLLET OPEN TO REMOVE

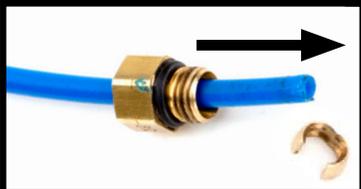

#3

SLIDE THE AIR FITTING OFF OF THE AIR LINE



#4

AIR LINE IS READY FOR INSTALLATION

**NOTE:** SCRATCHES AND/OR DEEP CUTS IN THE AIR LINE CAN RESULT IN POSSIBLE LEAKS. INSPECT THE AIR LINE BEFORE INSERTION. AIR LINE NEEDS TO BE REPLACED IF DAMAGED.



## AIR LINE INSERTION




Arnett parts come with pre-installed air line fittings for your convenience. **Do not remove or tighten.**




#1

AS RECEIVED

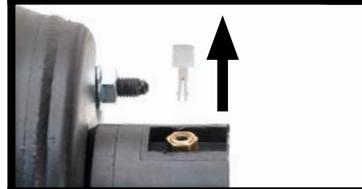

#2

REMOVE & DISPOSE OF SHIPPING PIN

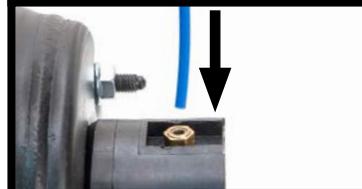


#3

INSERT THE AIR LINE INTO THE FITTING AND PRESS UNTIL FIRMLY SEATED



#4

AIR LINE INSERTED

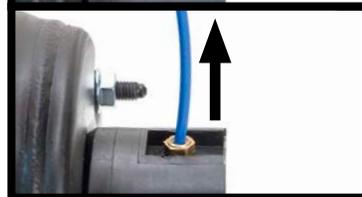

#5

PULL AIR LINE OUTWARD TO LOCK AND ENSURE A SECURE CONNECTION