
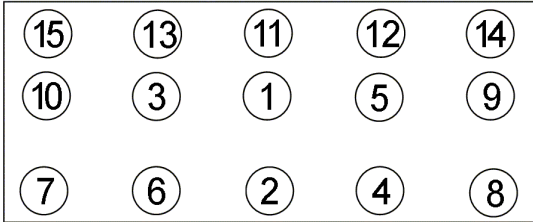


Anziehvorschrift für Zylinderkopf		475.625		
Tightening Instructions for Cylinder Head		passend für / suitable for adaptable à / adaptable a GM Cadillac / Chevrolet		
Instructions de serrage pour culasse				
Prescripciones de apriete para culatas				
Schraubenkopf / Head shape Tête de vis / Cabeza de tornillo		Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete		
				
Anziehen/ Tightening/ Serrage/ Apriete	M11 Pos. 1-10: 30 Nm ➤ Pos. 1-10: 90° ➤ Pos. 1-10: 70°	M8 Pos. 11-15: 30 Nm		
Zeichenerklärung / Explanations / Explication / Explicacion				
✱	neue Zylinderkopf-schrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
★	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
☐	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
●	Setzzeit	relaxation time	durée de tassement	tiempo de espera
➤	Drehwinkel	torque angle	angle de serrage	ángulo de giro
Motortyp / Engine type / Type de moteur / Tipo de motor				
Ø: 104 mm; 1,35 mm				
Mot: GEN IV				
LSA, LST, LS9				
6,0-6,2 ltr SC V8				
CTS Sedan, CTS V-Series, Camaro, Corvette, CTS Coupe				
ElringKlinger AG, Max-Eyth-Str.2 72581 Dettingen / Erms. Tel. 07123/724 601		*475.625*		